



SUPER DECK Y SERIES GAS DECK OVENS



Model Y-602
with optional casters

SPECIFICATIONS

BAKERS PRIDE Super Deck Y-Series gas Deck Ovens are designed for high volume pizza and all-purpose operations.

Ovens may be stacked two high. Oven exteriors are all heavy-gauge, type 403 stainless steel and are fully insulated up to 5" (127mm) thick for cooler outer temperatures and consistent interior temperatures.

Interior oven frame is constructed of 1/4" (6mm) heavy-duty angle iron frame, completely welded to form a single, unitized section. The oven body and lining are then welded to the framework.

Oven interiors are manufactured of high-heat resistant 16-gauge aluminized steel. Doors are fully insulated, spring balanced with tubular steel handles and will remain open or closed until moved.

All models feature independent, operator-controlled top & bottom heat control dampers and micro slides for perfectly balanced results.

Y Series features a 300°-650° F (149°-343°C) throttling thermostat, 8" (203mm) interior deck height with 1 1/2" (38mm) thick hearth baking decks (steel decks optional) and are supported by a 1/4" (6mm) angle iron frame.

Combination gas control incorporates a manual gas valve, pilot safety and pressure regulator. Easily removable, slide-out, heavy-duty flame diverters distribute the burner flame uniformly in the burner chamber. A 3/4" (19mm) NPT gas connection is located on the left side and left rear of oven - operator/installer may choose.

Heavy-duty, 7-gauge hot rolled steel legs are standard and finished with durable Bakertone.

2 Year limited part and labor warranty standard.

Job _____ Item # _____

GAS DECK OVENS



- ☐ Model Y-600 Single
- ☐ Model Y-602 Double
- ☐ Model Y-800 Single
- ☐ Model Y-802 Double

STANDARD FEATURES

- ☐ Y Series @ 120,000 BTUH per deck, natural or LP gas — CE not available in LP gas
- ☐ 300°-650° F (149°-343°C) throttling thermostat
- ☐ Top & bottom heat control dampers & micro-slides
- ☐ Combination gas controls with valve, regulator & pilot safety
- ☐ Heavy-duty, slide-out flame diverters
- ☐ 8" (203mm) interior deck heights with 1 1/2" (38mm) thick hearth stone baking decks
- ☐ All stainless steel exteriors
- ☐ Aluminized steel interiors
- ☐ Spring balanced, fully insulated doors
- ☐ Side or rear gas connections
- ☐ 7-Gauge legs
- ☐ Fully insulated throughout
- ☐ 2 Year limited part and labor warranty

OPTIONS & ACCESSORIES





- ☐ Side-mounted controls
- ☐ Steel decks
- ☐ Light stone decks
- ☐ 150°-550° F (65°-288°C) thermostat
- ☐ Set of 4 casters - two with locks
- ☐ Stainless steel leg covers
- ☐ Special height legs
- ☐ Steam Injection
- ☐ Automatic oven starter
- ☐ Draft flue for direct vent (not available on CE units)
- ☐ Fire brick hearth decks (Y-600/602 only)
- ☐ Black powder-coated bake chamber and combustion chamber doors with hardwood handles
- ☐ Black powder-coated hinged control panel door
- ☐ DSP style - apply stone or tile finish directly to oven exterior - skirts provided

CERTIFICATIONS




BAKERS PRIDE OVEN COMPANY, INC.
30 Pine Street, New Rochelle, NY 10801
914/576-0200 • 1-800-431-2745 • fax 914/576-0605
www.bakerspride.com

Continuous product improvement is a policy of Bakers Pride Oven Company. Therefore, specifications and design are subject to change without notification

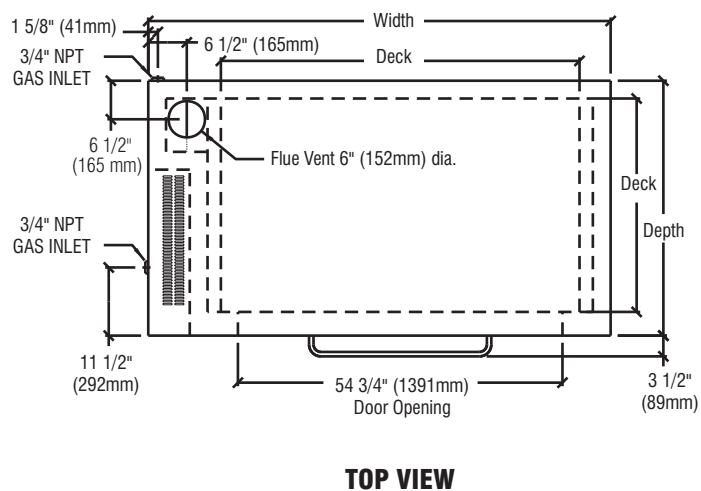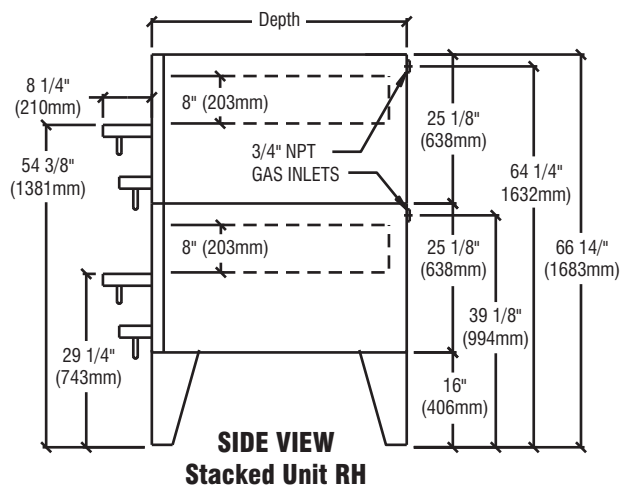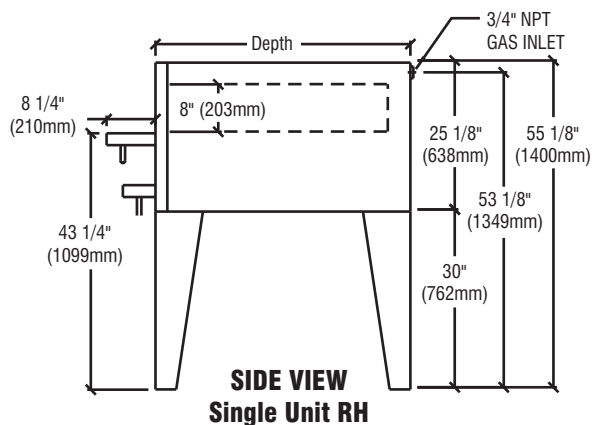

**MUST BE SPECIFIED
AT TIME OF ORDER**



STANDARD

ALL DIMENSIONS NOMINAL

SHIPPING INFORMATION

Model	Shipping Weight		Carton Dimensions				Crate Size		
	Lbs.	Kilos	Width Inches	mm	Depth Inches	mm	Height Inches	mm	Cubic Feet
Y-600	1385	626	31	787	53	1364	82	2083	76
Y-800	1600	726	31	787	60	1365	86	2184	78

Shipping class — #70

Each oven ships separately

Hearth Decks and Legs ship in separate cartons

GAS SUPPLY

Model	BTUH	KW	CONNECTION
Y-600	120,000	35.15	3/4"
Y-602	240,000	70.30	3/4"
Y-800	120,000	35.15	3/4"
Y-802	240,000	70.30	3/4"

CE certification not available in LP gas

SPECIFICATIONS

Model	Deck Sizes		# Decks	Overall Dimensions			
	in.	mm		Width Inches	mm	Depth Inches	Height Inches
Y-600	36 x 60	914 x 1524	1	78	1981	43	55 1/8
Y-602	36 x 60	914 x 1524	2	78	1981	43	66 1/4
Y-800	44 x 66	1118 x 1676	1	84	2134	51	55 1/8
Y-802	44 x 66	1118 x 1676	2	84	2134	51	66 1/4

MINIMUM CLEARANCES

	Noncombustible Construction		Combustible Construction	
	Inches	mm	Inches	mm
Right	0	0	1	25
Left	0	0	3	76
Rear	2	51	3	76



BAKERS PRIDE OVEN COMPANY, INC.
30 Pine Street, New Rochelle, NY 10801
914/576-0200 • 1-800-431-2745 • fax 914/576-0605
www.bakerspride.com

Continuous product improvement is a policy of Bakers Pride Oven Company.
Therefore, specifications and design are subject to change without notification

TSW: 11/07