


AVB VERTICAL BROILER

Innovative technology at work in the food service industry. These hand crafted Broilers are engineered and fabricated with the most advanced features to ensure a long demanding life. All welded frame construction and heavy gauge stainless steel panels ensure a long life, and exceptional quality; an all stainless steel body makes clean up easy. High efficiency atmospheric infra-red burners provide the maximum performance at the least possible cost. Three models to choose from so you can select the one most suited to your needs.



MODEL AVCB-2 SHOWN

AVB

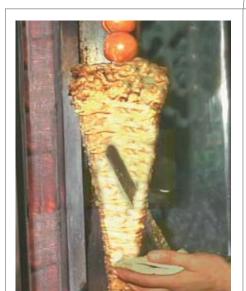



STANDARD FEATURES


- Heavy gauge frame construction.
- All stainless steel front, sides and top.
- Compact design for counter installation.
- NSF listed.
- One year limited warranty on parts and labor.

SPECIFICATIONS

- Sturdy skewer to hold up to 30lbs. of meat.
- 15" diameter pan at the bottom, slide adjustment front to back.
- High efficiency infrared burners rated @ 25,000 BTU/hr.each AVB-1 (1), AVB-2 OR AVCB-2(2).
- Manual valve control for each burner.
- Heavy duty powerful gear motor for smooth and even rotation.
- Toggle switch to turn gear motor on.
- 6 position adjustment of skewer.

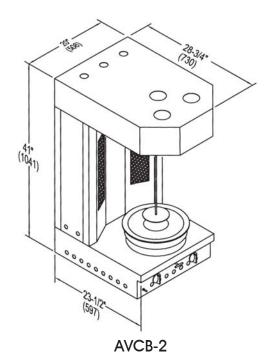

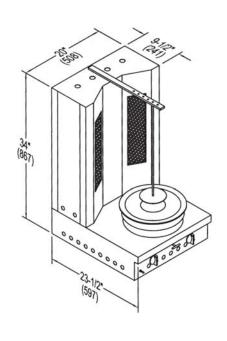

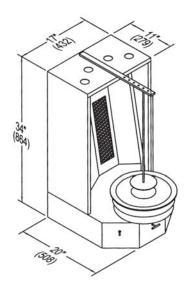

AVB-1

AVB-2

VERTICAL BROILER

MODEL	WIDTH	DEPTH		BURNEF	RS TOTAL BTU	J KW	SHIP. WT. Lbs.	Kg.
AVB - 1	HEI Ø HT	23 1/2"	34"	1	25,000	7.33	100	45
AVB - 2	20"	23 1/2"	34"	2	50,000	14.65	125	57
AVCB - 2	20"	23 1/2"	41"	2	50,000	14.65	150	68

STANDARD FEATURES

- Sturdy skewer to hold up to 30 lbs. of meat.
- 15" (381) diameter pan at the bottom, slide adjustment front to back.
- High efficiency infrared burners rated @ 25,000 BTU/hr. each (AVB-1 (1), AVB-2 OR AVCB-2(2)).
- Manual valve control for each burner.
- Heavy duty powerful gear motor for smooth and even rotation.
- Toggle switch to turn gear motor on.
- 6 position adjustment of skewer.

GAS AND ELECTRICAL INFO

Manifold pressure:

5" W.C. - Natural gas 10" W.C. - Propane gas

- When ordering, please specify type of gas and altitude if over 2000 ft.
- Gas inlet size:

3/4" NPT at rear bottom

- A gas pressure regulator is provided and must be installed when the appliance is connected to the gas supply.
- 120V, 1 phase, 2 Amps, 6ft., 3 Prong grounded power cord provided.

Gas: Manifold pressure is 5.0" W.C. for natural gas or 10.0" W.C. for propane gas.3/4"NPT Gas inlet. Specify type of gas and altitude over 200 feet. Clearances: For use only on non-combustible counters. Clearance to non combustible construction 0"

American Range Corporation is a quality manufacturer of commercial cooking equipment. Because of continuing product improvements these specifications are subject to change without prior notice.

