



Conforms to UL STD. 763 and NSF Std. 08
Conforms to CSA Std. C22.2

TC 22 - 32 COLORADO

heavy-duty meat grinders



TC 22 Colorado



- Powerful - up to 3 Hp - and compact for busy environments where space is at a premium.
- Complete stainless steel construction to withstand heavy-duty application and ensure the highest levels of hygiene.
- Fast and easy breakdown and assembly without tools for thorough cleaning.
- High efficiency 2 and 3 Hp air-cooled motors for continuous operation.
- Gear motor with oil-bath transmission and double seal for long-lasting and maintenance-free operation.
- Supplied with one simple cut knife and plate.

Features

Technical

- Sealed gear box with hardened gears in oil bath.
- Stainless steel AISI 304 conveying screw and head.
- 5 different plates available (3/16", 7/32", 5/26", 3/8", 9/16").

Safety

- An interlock stops the machine when removing the feed tray.

Sanitary

- Head is completely removable for an easy and fast cleaning and sanitation.

Specifications

Standard plate:	TC 22: 3/16" (4.5 mm.) TC 32: 1/4" (6 mm.)
Motor 22:	2 Hp (1,470 W), fan cooled.
Motor 32:	3 Hp (2,205 W), fan cooled.
Electrical 22:	120V AC, 60Hz (220V AC, 60Hz available)
Electrical 32:	220V AC, 60Hz
Electrical 32 F:	220V AC, 60Hz 3-phase
Plug and Cord:	Attached, flexible, 3 wire SJT 16 AWG, 6'4" long cord.
Switch:	Rotary on/off/reverse






TC 32 Colorado



TC 32 Colorado F
(Floor model)

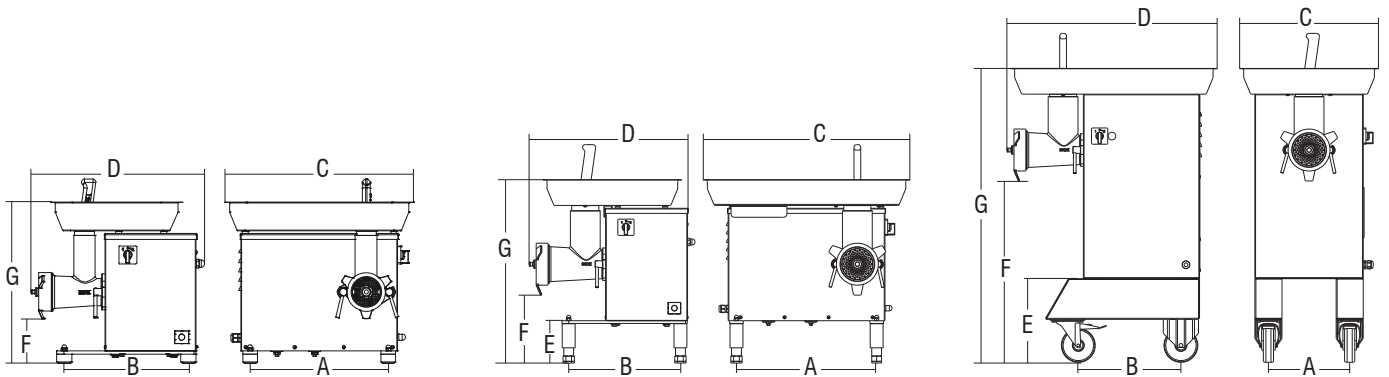

	Power	Power source	TC output/h	Standard plate	A	B	C	D	E	F	G	Net weight	Shipping	Gross weight
	watt/Hp		lbs./h.	Ø inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	lbs.	inch.	lbs.
TC 22 Colorado	1470/2	120V AC, 60Hz	660	3/16"	14 ²⁹ / ₆₄ "	12 ⁶³ / ₆₄ "	18 ³⁷ / ₆₄ "	18 ¹¹ / ₆₄ "	-	4 ¹¹ / ₁₆ "	16 ⁵⁷ / ₆₄ "	70	28 ¹¹ / ₃₂ " x 22 ⁷ / ₁₆ " x 30 ⁵ / ₁₆ "	96
TC 32 Colorado	2205/3	220V AC, 60Hz	880	1/4"	16 ¹⁹ / ₆₄ "	12 ⁶³ / ₆₄ "	24 ¹ / ₆₄ "	18 ¹ / ₂ "	7 ⁷ / ₈ "	21 ¹¹ / ₃₂ "	25 ²⁵ / ₆₄ "	81		107
TC 32 Colorado F	2205/3	220V AC, 60Hz	880	1/4"	9 ²⁹ / ₆₄ "	11 ⁵⁸ / ₆₄ "	16 ⁹ / ₆₄ "	24 ²⁹ / ₆₄ "	9 ²³ / ₃₂ "	21 ⁷ / ₆₄ "	34 ¹¹ / ₆₄ "	112		138